



German manufacturing plant

Ferrule processing Set - Twistor®



P/N

610 912

Description



Set Contains:
1 x TWISTOR16 and 1x MultiStrip 10

Get connected with Rennsteig - call or go online:

Sales Office

411 Hackensack Avenue,
Suite 200
Hackensack, NJ 07601

fon: 330-315-3044

fax: 330-319-8135

mobil: 201-275-5981

web: www.rennsteig.us

mail: sales@rennsteig.us

Technical Support

fon: 201-623-9583

fax: 201-623-2821

mobil: 201-275-5980

web: www.rennsteig.us

mail: tech@rennsteig.us

Warehouse

403 Kennedy BLVD

Somerdale, NJ 08083



facebook.com/rennsteigtools



linkedin.com/company/rennsteig-tools-inc.



twitter.com/RennsteigTools




youtube.com/RennsteigToolsInc



WWW.RENNSTEIG.US

We are the manufacturer. WE KNOW HOW!

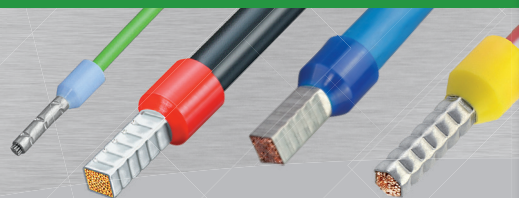

Ferrule Crimping Tools *for professionals*



RENNSTEIG
The Right Tool.

WWW.RENNSTEIG.US



Ferrule crimping tool PEW 8

- Self-adjusts to the desired ferrule size
- Ferrule insertion on the side of the tool
- Multiple crimp profiles
- Burnished or chrome finish
- Specially hardened spring steel



- The established, patented tool further improved
- Expanded capacity at square crimp model and hexagonal crimp model
- Average hand force reduced by approx. 20 % compared to previous model
- Reduced opening width and improved ergonomics
- High-precision die geometry leads to a clearly defined crimp shape of the ferrule
- Automatic self-adjustment to requested wire size

PEW 8.185 - Square Crimp - Side loaded



P/N	Description
610 185 3	Square crimp with 4 serrated crimping profiles (28 - 5 AWG)

PEW 8.186 - Hexagonal Crimp - Side loaded



P/N	Description
610 186 3	Hexagonal crimp with 6 serrated crimping profiles (28 - 7 AWG)

Automatic Ferrule Crimping Tool - Twistor®16



P/N	Description
610 190 6	Square crimp with 4 serrated crimping profiles (28 - 5 AWG)
	360° rotatable crimping head
	Optimal square crimping profile
	Self-guiding jaws

PEW 8.88 - Square Crimp - Front loaded



P/N	Description
610 088 3	Square crimp with 4 serrated crimping profiles (28 - 5 AWG)